


We UVCare...

UV Connect

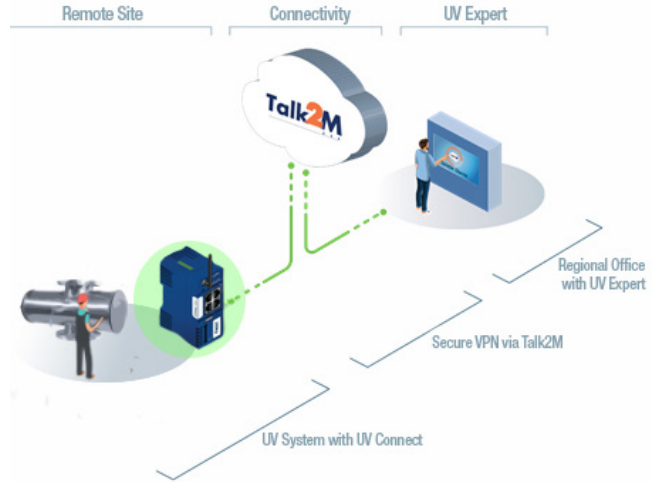

UV Connect gives you access to a UV system expert no matter where you are in the world.

How critical is the UV system to your process? Can you afford downtime? Would it help to have an expert by your side every time you stand in front of the UV system?



UV Connect provides a secure VPN connection from the UV system to one of our regional offices via Talk2M, a cloud-based remote connectivity solution. This allows our UV system engineers to see what you are seeing on the control panel, and recommend the steps needed to resolve problems. The engineer can also make real-time adjustments to the UV system's software settings to allow for changing site conditions.

Either install UV Connect as a precaution and use as needed, or sign up for a monthly health check and receive a report card outlining the condition of the UV system, any actions you should take to improve performance and a list of upcoming maintenance tasks. Either solution gives you the peace of mind of knowing that you have a UV system expert standing by your side.

Health Check Example

HIGHLIGHTS

- Integrated WiFi or Cellular options, including 4G versions for Europe (EU), North America (NA) or Japan (APAC)
- Firewall-friendly outbound connection
- SD card option for easy commissioning
- Possible to configure the digital inputs to control internet connection with external key switch or to send alarm notification
- Service includes a regular health check to ensure proper efficiency and function

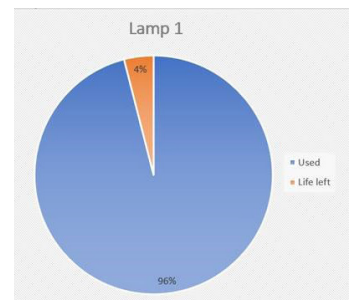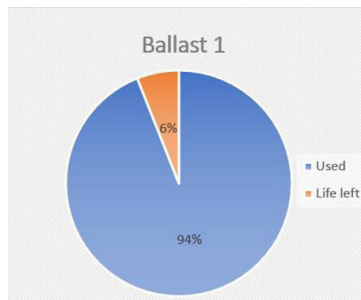

STANDARDS & DIRECTIVES

WAN Ethernet:	Up to 3 ports, 10/100 Mb Ethernet
LAN Ethernet:	Up to 4 ports, 10/100 MB
Field Interface:	Up to 10 USB 2.0 connections, female connector 2.0
SD card reader:	YES, for commissioning (firmware upgrade, backup, Talk2M registration)
Router:	IP filtering, IP forwarding, NAT, Port forwarding, Proxy, Routing table, DHCP client/server
Internet:	Outbound connection for Talk2M using HTTPS (port 443 or UDP 1194)
VPN Tunneling:	OpenVPN either in SSL UDP or HTTPS
Talk2M:	Talk2M Free+ or Talk2M Pro, natively supported
VPN Security:	Communications between the remote user and the UV Connect are fully encrypted using the SSL/TLS protocol, thereby ensuring data authenticity, integrity & confidentiality. All users and UV Connect units are authenticated using x509 SSL certificates and end-to-end traffic is encrypted using strong symmetric & asymmetric algorithms that are part of the SSL/TLS protocol cipher suite.
Synchronization:	Embedded real-time clock, manual setup via http or automatic via NTP
File Management:	FTP server for configuration, firmware update
Web-based configuration:	Embedded web interface with setup wizards for configuration and maintenance (no additional software needed). Basic Authentication (login/password) and session control for security.
Mechanicals:	Dimensions: 108 x 99 x 42 mm (H x D x W) Weight: 191 gr DIN rail or wall screw fixing system
Power Supply:	12-24 VDC +/- 20%, LPS
Extended Temperature Range:	Operating: -25°C to +70°C, 10 to 95% relative humidity (non-condensing) Storage: -40°C to +70 °C, 10 to 95% relative humidity (non-condensing)
Hardware:	1xD): open drain (MOSFET) 200mA, isolation 1.5kV 2xDI: 0 to 24VDC; 1.5kV isolation
Marking:	CE, cULus listed, FCC
Warranty:	36 months
FCC:	Compliant with CFR 47, part 157B Class A; 15C; 22H; 24E; 27
IC:	Compliant with IC (Industry Canada) RSS-132; RSS-133, RSS-139; RS-210
Japan:	This equipment has the Type Approval Certification based on the Radio Law
Safety:	Conform to: EN60950-1; UL60950-1; CSA-C22.2 n° 60950-1-07 UL listed: file number# 350576 CB Certificate n° DK-42240-A1-UL, DK-72992-UL

FEATURES FOR THE EC6133G (CELLULAR 4G EU)

Bands:	4G: B1, B3, B7, B8, B20 3G: B1, B8 Automatic fallback to 3G W
Antenna Connector:	type SMA - Female
Antenna Weight:	not included in delivery
Weight:	202 gr

FEATURES FOR THE EC6133H (CELLULAR 4G NA)

Bands:	4G: B1, B3, B5, B7, B8, B18, B19, B21, B28, B38, B39, B40, B41 3G: B1, B5, B6, B8, B9, B19, B39 Automatic fallback to 3G
Antenna Connector:	type SMA - Female
Antenna Weight:	not included in delivery
Weight:	202 gr

FEATURES FOR THE EC6133F (CELLULAR 4G APAC, ONLY JAPAN)

Bands:	4G: B1, B3, B5, B7, B8, B18, B19, B21, B28, B38, B39, B40, B41 3G: B1, B5, B6, B8, B9, B19, B39 Automatic fallback to 3G
Antenna Connector:	type SMA - Female
Antenna Weight:	not included in delivery
Weight:	202 gr

FEATURES FOR THE EC6133D (CELLULAR 3G)

Frequencies:	GSM/GPRS/EDGE Quad-Band (850, 900, 1800, 1900 MHz) - HSPA+ UMTS Pentaband module (800/850, 900, AWS 1700, 1900, 2100 MHz)
Antenna Connector:	type SMA - Female
Antenna Weight:	not included in delivery
Weight:	202 gr

FEATURES FOR THE EC6133C (WIFI)

WAN Connectivity:	Ethernet or WiFi 802.11 b/g/n
Frequencies:	Channels: 1 to 11 (inclusive)
Security:	WPA2, WPA and WEP
Antenna Connector:	RP-SMA female connector
Antenna:	Included in the delivery, frequency: 2.4 GHz, impedance L 50 Ohms; gain: 2.0dBi
Weight:	199 gr



www.weuvcare.com

BERSON, HANOVIA & AQUIONICS WORKING TOGETHER AS PART OF THE HALMA GROUP.

China

t: +86 21 61679599
e: china@hanovia.com

Malaysia

t: +60 16 440 8834
e: asia@hanovia.com

USA/Canada

t: +1 980 256 5700
e: sales@aquionics.com

Netherlands

t: +31 40 2907777
e: sales@bersonuv.com

United Kingdom

t: +44 1753 515300
e: sales@hanovia.com

Mexico

t: +1 980.256.5700
e: sales@aquionics.com



A Halma company