


We UVCare...



## Application Optimized UV for Food & Beverage

**PURELINE S PH 5-15**

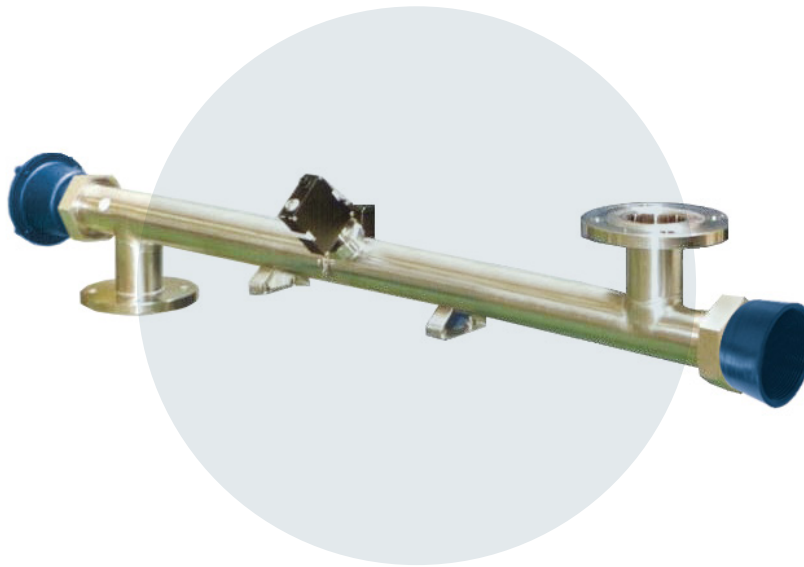

### UV disinfection for sugar syrup


Our PureLine S PH systems are aimed specifically at providing UV disinfection for sugar syrup used in the food and beverage industry. By using a UV system you will disinfect the sugar syrup, eliminate harmful micro-organisms, removing the need for thermal pasteurisation with its associated energy costs. Each system comes with a UV monitor to measure the germicidal output of the UV system and make it easy to monitor and log performance.

**berson**

**hanovia**


**aquionics**

# PureLine S PH™ sugar syrup disinfection

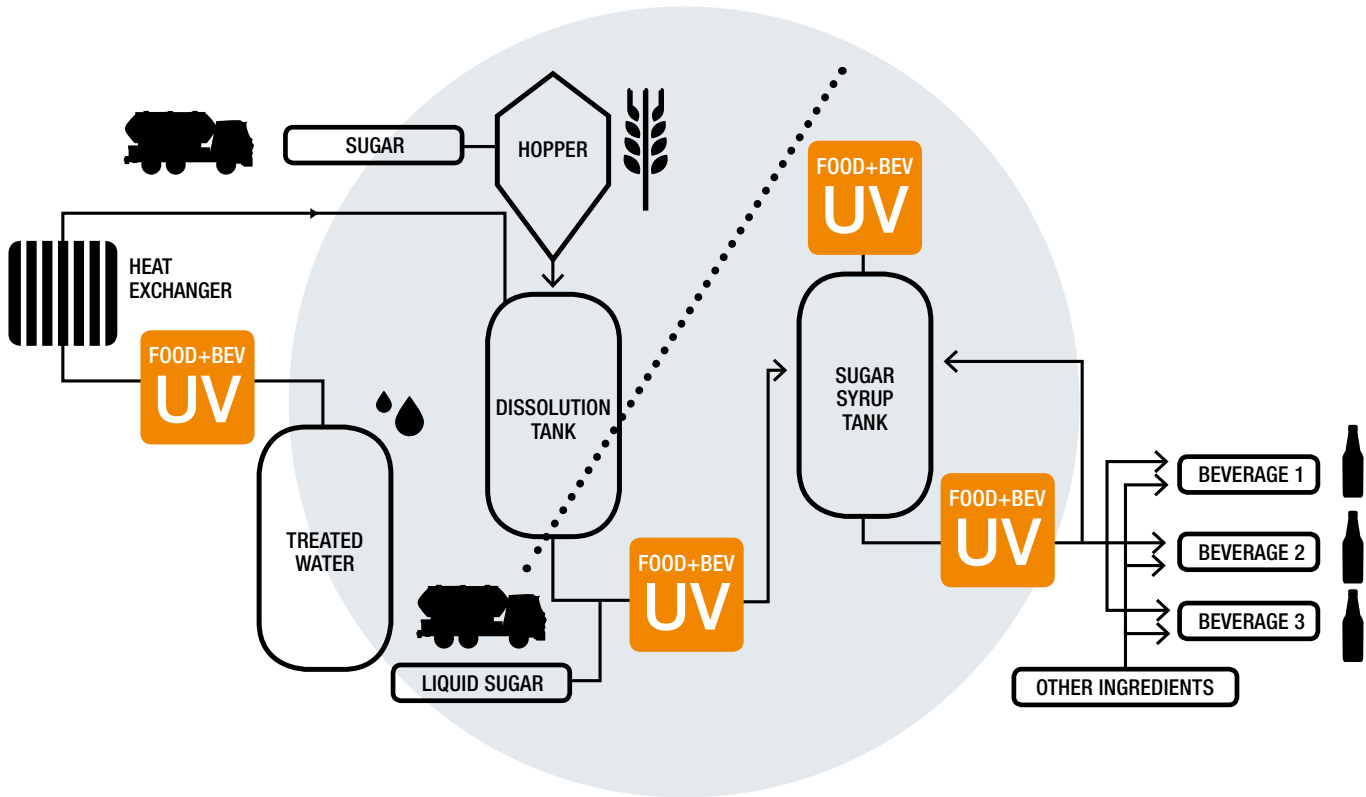

KEY FEATURES	WHAT IT GIVES YOU	BENEFITS FOR YOU
<b>INTELLIGENCE</b>		
UV intensity monitor measuring germicidal wavelengths	Continuous verification of performance with in-built low intensity alarm	Easy to monitor and log system performance
<b>OPTIMIZATION</b>		
UV disinfection	Protect your sugar syrup from microbiological contamination including thermophilic bacteria	Does not affect taste and colour of final product
		No chemicals
Designed for the food and beverage industry	FDA-approved materials used for all wetted parts	Industry compliant materials
	*Chamber with tri-clamp connections and <0.38 µm internal finish	Sanitary design
<b>INTEGRATION</b>		
Compact design	Can be fitted to skids Can be retrofitted to existing process	Easy integration

\*Option

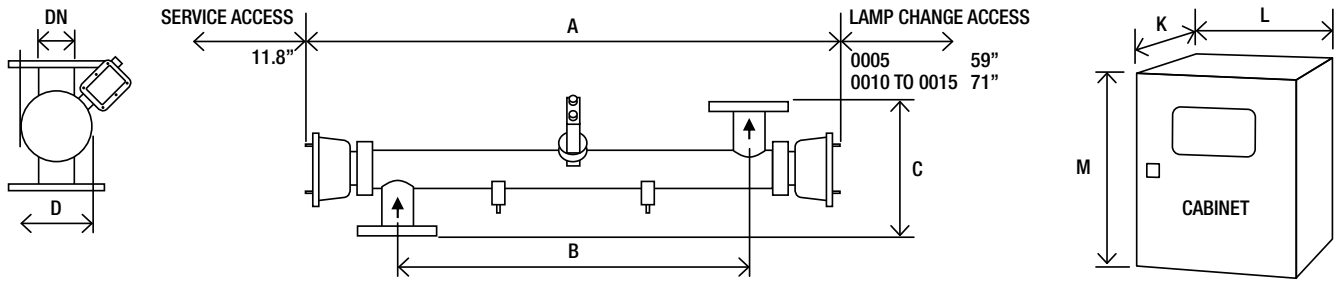

Model Number	Maximum Power (kW)	Min T <sub>10</sub> (%)	Dimensions (Inches)								Approx weight (lb)	
			A	B	C	D	DN	K*	L	M**	Chamber (Empty)	Control Cabinet
PureLine S PH 0005	2.7	30	37.6	23	7.4	6.3	1.6	13	29.5	33.5	44	187.4
PureLine S PH 0010	4.2	20	47.6	32.5	11	6.3	1.6	13	29.5	33.5	46.3	187.4
PureLine S PH 0015	5.8	15	57.7	39.4	11	6.3	2.6	13	35.4	43.3	48.5	363.8

\* Allow dimension L in front of cabinet for door opening and panel access.

\*\* M dimension includes the space for the cabinet mounting brackets but you need to allow space below the cabinet for cable entry and access (minimum of 9.8").

All dimensions are approximate for clearance purposes only. We have a policy of continuous product development, exact drawings are available on request. All specifications are subject to change without notification. Your distributor or our account manager can advise on correct sizing and specification requirements.

UV CHAMBER	
Material:	Stainless steel 316L / 1.4404
Internal finish:	As made pipe and tube, welds as laid, electropolished and passivated
External finish:	Sateen polish (120 grit) electropolished and passivated
Process (mating) connections:	Flange EN 1092-1 PN16
Drain connection:	Tri-clamp to ISO 2037
End plate:	Removable end plate
Degree of protection:	IP65 equivalent to NEMA 4 but not for outside use
Arc tube (lamp):	Medium pressure
Arc tube enclosure:	Pure quartz
Number of arc tubes (lamps):	1
Expected lamp life:	8000 hours, 4000 hours S PH 0015
Temperature sensor:	Yes
UV sensor:	Wet UV monitor (if above minimum T <sub>10</sub> )
Working fluid temperature:	41°F to 176°F
Maximum CIP temperature:	203°F with cabinet electrically isolated
Hydrostatically pressure tested:	Yes to PED requirements EN 13445
Chamber mounting:	Horizontal only
Operating pressure:	6 bar
Seals:	EPDM, ADI free, EC 1935/2004, FDA 21 CFR 177.2600 approved

OPTIONS	
Document Support Pack	
Cabinet material: Stainless steel 304	
Operation and Maintenance manual and printed Installation and Commissioning manual in Chinese, English, French, German and Spanish	
Flange options: ANSI 150, JIS, Table 'E' and tri-clamp	
Chamber internal finish: <0.38 µm welds polished out, electropolished and passivated	
Lead length: 65.6 ft, 98.4 ft or 164 ft cabinet to chamber	
Maximum CIP temperature: 266°F (panel switched off)	
Welder Document Pack for chamber construction	

OPTIONS (CONTINUED)	
Bleed valve: Hygienic valve with tri-clamp connection	
Skid mounting	
Operating pressure: 10 bar	
Vent valve: Manual valve hygienic design	
Cabinet IP rating: Carbon steel air to air heat exchangers IP 65, NEMA 4 or stainless steel version IP 65, NEMA 4X	
CABINET	
Material:	Polyester coated carbon steel
Degree of protection:	IP54 NEMA 12
Supply voltages (nominal):	S PH 0005 95 V to 260 V S PH 0010-0015 190 V to 480 V (voltage tolerance ± 10% of nominal)
Operating temperature range:	41°F to 104°F
Relative humidity:	<85% non-condensing
Cooling fans:	Yes
Interconnecting cable lengths:	32.8 ft cabinet to chamber

CUSTOMER OUTPUTS	
4-20 mA passive or active output:	UV intensity %
VFC outputs:	System warning, lamp ready, low UV intensity, common trip, remote reset, ELCB or water leak, system available, local or remote mode

CUSTOMER INPUTS	
4-20 mA passive or active input:	Flow meter
VFC inputs:	Remote stop/start and remote reset

CUSTOMER COMMUNICATIONS PORT	
None	

APPROVALS	
CE marked	



## PURELINE S

Also available in our Food & Beverage product range...



### PURELINE DC+DCD

Dechlorination and Chlorine  
Dioxide removal



### PURELINE DO

Ozone removal and  
disinfection



### PURELINE D

Disinfection as part of a  
multi barrier approach



### PURELINE PQ

3rd party bioassayed systems  
for critical disinfection or as a  
pathogen barrier



[www.weuvcare.com](http://www.weuvcare.com)

BERSON, HANOVIA & AQUIONICS WORKING TOGETHER AS PART OF THE HALMA GROUP.

#### Netherlands

t: +31 40 2907777  
e: sales@bersonuv.com

#### China

t: +86 21 61679599  
e: china@hanovia.com

#### USA

t: +1 980 256 5700  
e: sales@aquionics.com

#### Germany

t: +49 611 44575375  
e: verkauf@hanovia.com

#### Malaysia

t: +60 16 440 8834  
e: asia@hanovia.com

#### Canada

t: +1 980.256.5700  
e: sales@aquionics.com

#### United Kingdom

t: +44 1753 515300  
e: sales@hanovia.com

#### Mexico

t: +1 980.256.5700  
e: sales@aquionics.com



A **Halma** company