


We UVCare...

# Application Optimised UV for Pools & Leisure



SWIMLINE PQ IL

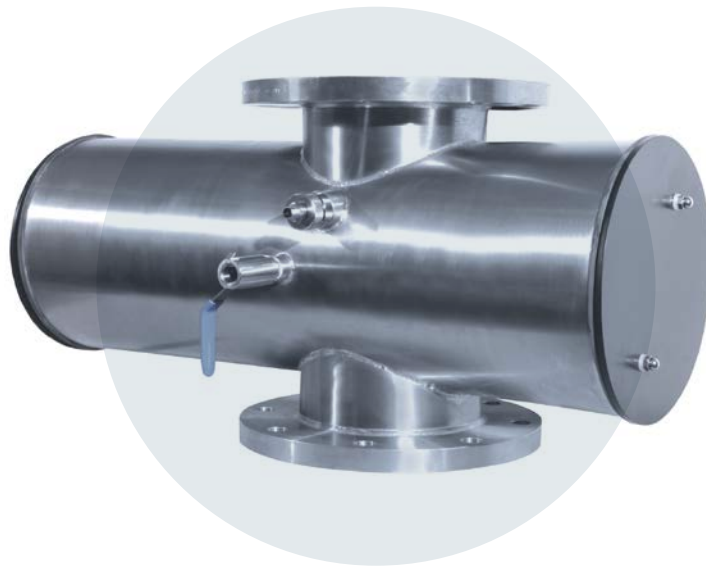

Optimised UV  
treatment for pools  
and spas


Our SwimLine PQ IL UV systems are optimised to deliver effective treatment (chloramine removal and disinfection) for all leisure facilities from spas through to large competition pools. By using medium pressure lamps we break down not only monochloramine but also di- and trichloramine which are responsible for eye and skin irritation, headaches and unpleasant odours. Using UV in the water treatment process provides bathers and staff with a pleasant and safe environment. UV has the added advantage of being effective against chlorine resistant microorganisms such as *Cryptosporidium* and is up to 5 times cheaper to maintain and occupies only 1/10th of the space of ozonation equipment.

berson


hanovia

aquionics

# SwimLine PQ IL™ Single pool with UV treatment

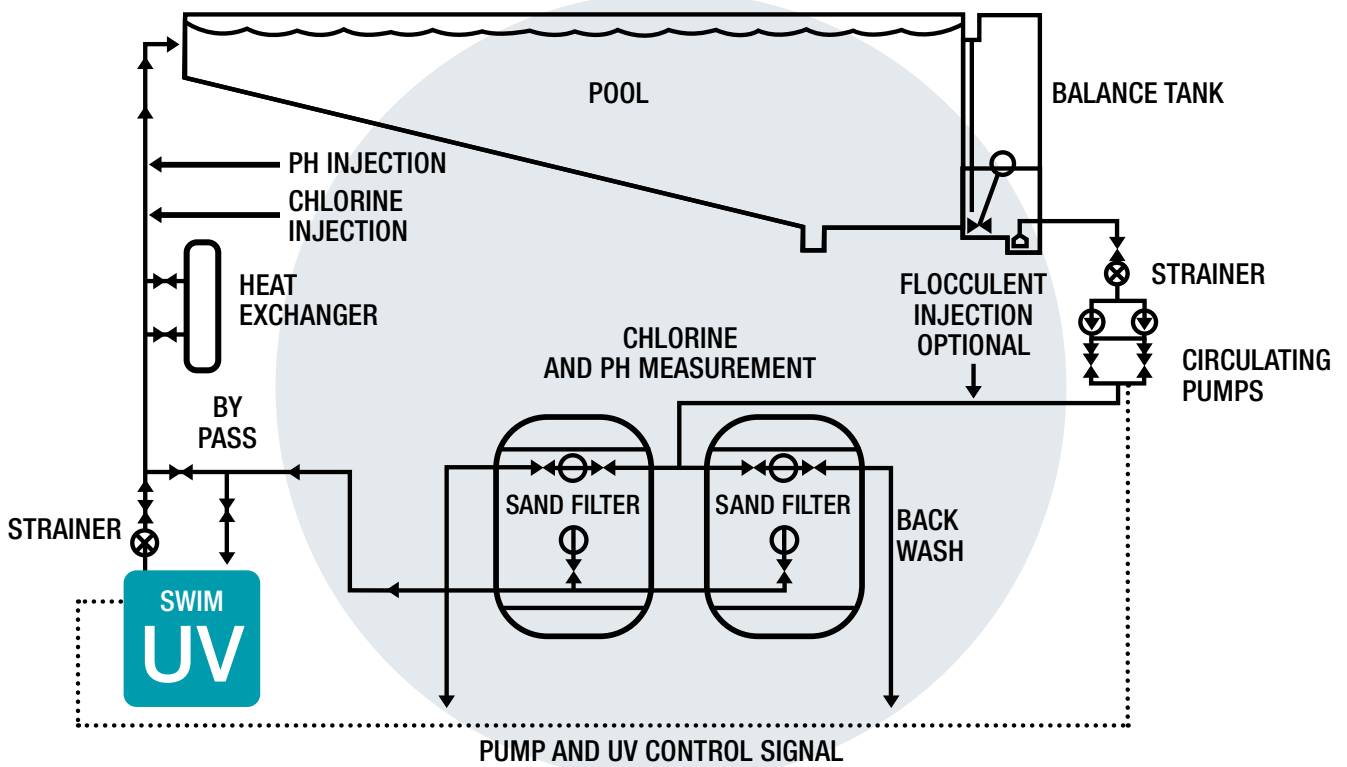

KEY FEATURES	WHAT IT GIVES YOU	BENEFITS FOR YOU
<b>INTELLIGENCE</b>		
UV sensor	Continuous verification of performance with in-built low dose alarm	Easy to monitor and log system performance
Flow and UV transmittance (UVT) meter input	Stepless adjustment of lamp power based on real time operating conditions	Optimised use of energy, saving operating costs
<b>OPTIMISATION</b>		
Medium pressure lamps	Provides UV light at 200 to 400 nm wavelengths ideal for the destruction of mono-, di- and trichloramine	Visibly clear water with reduced odours
		Reduced building corrosion risk
		Minimises bathers' eye and skin irritation
	Provides germicidal wavelengths to disinfect the water	Protect bathers from chlorine resistant microorganisms such as <i>Cryptosporidium</i> or <i>Giardia</i>
	Lower maintenance cost compared to multi-lamp system	Reduced operating costs
Automatic wiper (quartz cleaning)	Self cleaning	
<b>INTEGRATION</b>		
Designed specifically for pools	Compact design	Easy integration

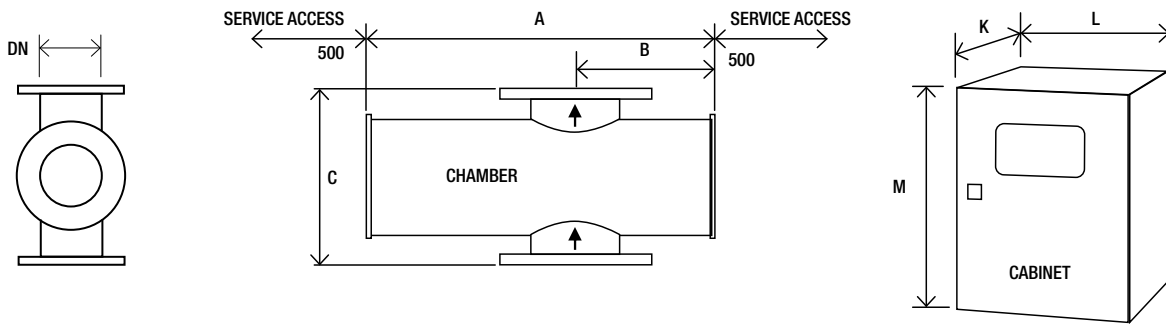

Model Number	Max. power (kW)	No of lamps	Dimensions (mm)				DN	Cab. No***	Cabinet (fan cooled) <sup>a</sup>			Approx weight (Kg)	
			A	B	C	Chamber			K*	L	M**	Chamber Empty	Cabinet Fan cooled
SwimLine PQ IL 100	1.8	2	780	310	400	100	1	300	800	1000	42	50	
SwimLine PQ IL 4000	17.5	4	896	368	550	350	1	600	1000	2100	150	180	

\* Allow dimension L in front of cabinet for door opening and panel access.

\*\* M dimension includes the space for the cabinet mounting brackets but you need to allow space below the cabinet for cable entry and access (minimum of 250 mm).

\*\*\* CC: Control cabinet, PC: Power cabinet

<sup>a</sup> Attention: the optional cabinet with A/C is bigger. Ask for dimensions.

All dimensions are approximate for clearance purposes only. We have a policy of continuous product development, exact drawings are available on request.

All specifications are subject to change without notification. Your distributor or our account manager can advise on correct sizing and specification requirements.

### UV CHAMBER

Material:	StSt 316L / 1.4404
Internal finish:	< 0.8 µm Ra, welds ground out, electropolished and passivated
External finish:	Brushed to K280, electropolished and passivated
Process (mating) connections:	Flange EN 1092-1 PN10
Drain connection:	BSPT Socket or NPT if ANSI flange
Air vent connection:	BSPT Socket or NPT if ANSI flange
End plate:	Removable end plate
Degree of protection:	IP54 equivalent to NEMA 12, but not for outside use
Wiper:	Automatic (electrically driven)
Arc tube (lamp):	Medium pressure
Arc tube enclosure:	Doped quartz (F240)
Number of arc tubes (lamps):	see table above
Expected lamp life:	12000 hours
Temperature sensor:	Yes
UV sensor:	Calibrated DVGW compliant dry sensor
Working fluid temperature:	1°C to 60°C
Strainer	Yes
Hydrostatically pressure tested:	Yes
Chamber mounting:	Flow horizontal or vertical (lamps horizontal only)
Operating pressure:	6 bar (positive pressure only)
Seals:	EPDM, ADI free, EC 1935/2004, FDA 21 CFR 177.2600 approved

### OPTIONS

Operation and Maintenance manual and printed Installation and Commissioning manual in Chinese, English, French, German & Spanish
Flange options: PN16, ANSI 150, JIS, Table 'E'
Lead length: 20 and 29 m
In-field UV reference sensor kit
UL 508A
Aggressive water package: For 400 ppm to 20000 ppm chloride water
Water leak detection: Detects water leaks from quartz sleeve
Water level sensor: UV chamber full water detection

### CABINET (CONTROLLER UVTRONIC)

Material:	Polyester coated carbon steel, RAL 7035
Degree of protection:	IP54 (NEMA 12)
Supply voltages:	PQ IL 100: 200-277 V (+/-10%) (2ph L1,L2 or 1ph L1+N) PQ IL 4000: 380-480 V (-5% to +10%) (3ph L1, L2, L3) 50/60 Hz
Operating temperature range:	5°C to 35°C
Relative humidity:	<85% non-condensing
Cooling fans:	Yes
Interconnecting cable:	10 m to chamber
Variable power:	Stepless variable power (70% reduction from maximum ballast power)

### HMI / CONTROL

Display:	4 line LCD, indicating system status including alarms
Operating menu:	3 levels (2 with password protection)
Fault finding:	Event log

### CUSTOMER OUTPUTS

4-20 mA passive output:	UV intensity, ballast power, UV dose
VFC outputs:	Standby in remote, system standby, system cooling down, any trip, any warning, UV intensity or dose failure, system ready, wiper failure, lamp failure, water leak, water temperature warning, water & cabinet temperature alarm

### CUSTOMER INPUTS

4-20 mA active or passive inputs:	Flow meter and UV transmittance meter inputs:
VFC inputs:	Remote stop/start, remote clear message, remote wipe, remote set power high

### CUSTOMER COMMUNICATIONS PORT

Modbus RS 485 serial RTU for SCADA connection

### APPROVALS

CE marked



**SWIMLINE PQ**

Also available in our Pools & Leisure product range...



**SWIMLINE PH**

Standard disinfection and  
dechloramination



**[www.weuvcare.com](http://www.weuvcare.com)**

BERSON, HANOVIA & AQUIONICS WORKING TOGETHER AS PART OF THE HALMA GROUP.

**Netherlands**

t: +31 40 2907777  
e: sales@bersonuv.com

**China**

t: +86 21 61679599  
e: china@hanovia.com

**USA**

t: +1 980 256 5700  
e: sales@aquionics.com

**Germany**

t: +49 800 5892779  
e: verkauf@hanovia.com

**Malaysia**

t: +60 16 440 8834  
e: asia@hanovia.com

**Canada**

t: +1 980.256.5700  
e: sales@aquionics.com

**United Kingdom**

t: +44 1753 515300  
e: sales@hanovia.com

**Mexico**

t: +1 980.256.5700  
e: sales@aquionics.com